

ELIMPO DIM-ALLOUT

All-Out switch/module with delay



- central/all out command
- loads up to 3500VA
- possibility for switching with delay
 - with adjustable time from 1m30s to 2m30s
- fit for all ELIMPO dimmers
- fit for all brands of electronic telebreakers
- compact dimensions, 1 module
- mounted on DIN-rail
- 2 years warranty

connection: screw connector

power: 240V - 15A max. 3500 VA

temperature: environment temperature

dimensions: 1 DIN-module




weight: 95 gr

installation: on DIN-rail

load: dimmers, electronic telebreakers

control: push button, relay or

ELIMPO RF-receiver RX2200/TX01-02

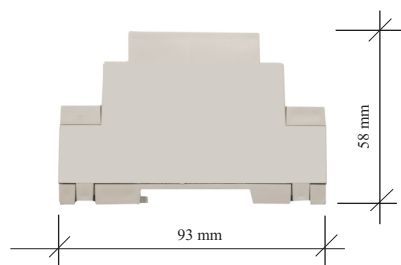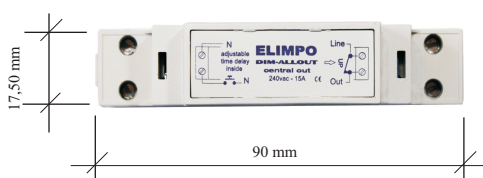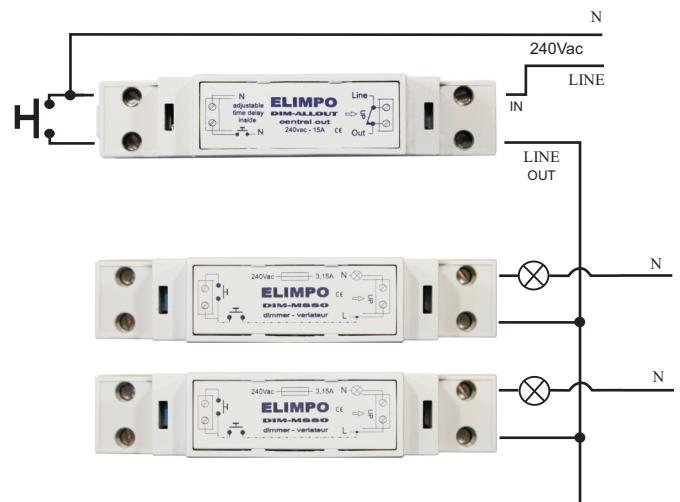

ELIMPO

www.elimpo.com

